

Kseries K403 K803 K163

Mid / High Unit System

The K403/803/163 is a series product, using the high quality 3" neodymium speaker units skillfully assembled into column speakers to meet the demands of different small and medium-scaled places, and the box body is made of aluminium alloy. The IP46 international standard can be met based on special request.

KK403/K803/K163 是一个系列产品，利用优质3"喇叭单元巧妙组合成的音柱，以满足不同中小型场所使用需求，箱体采用铝合金制作。可应需求做到满足IP46国际标准。

FEATURES

- Light weight aluminium alloy enclosure
- Multi combinations and installation ways
- Used for moving performance, church and multi-purpose hall


产品特征

- 高质量单元配置，铝合金箱体
- 多种安装方式，操作简易快捷
- 超长品质保证期：品质与信心的保证

适用范围

- 会议室、多功能厅、教堂、小型流动商演

CONFIGURATION

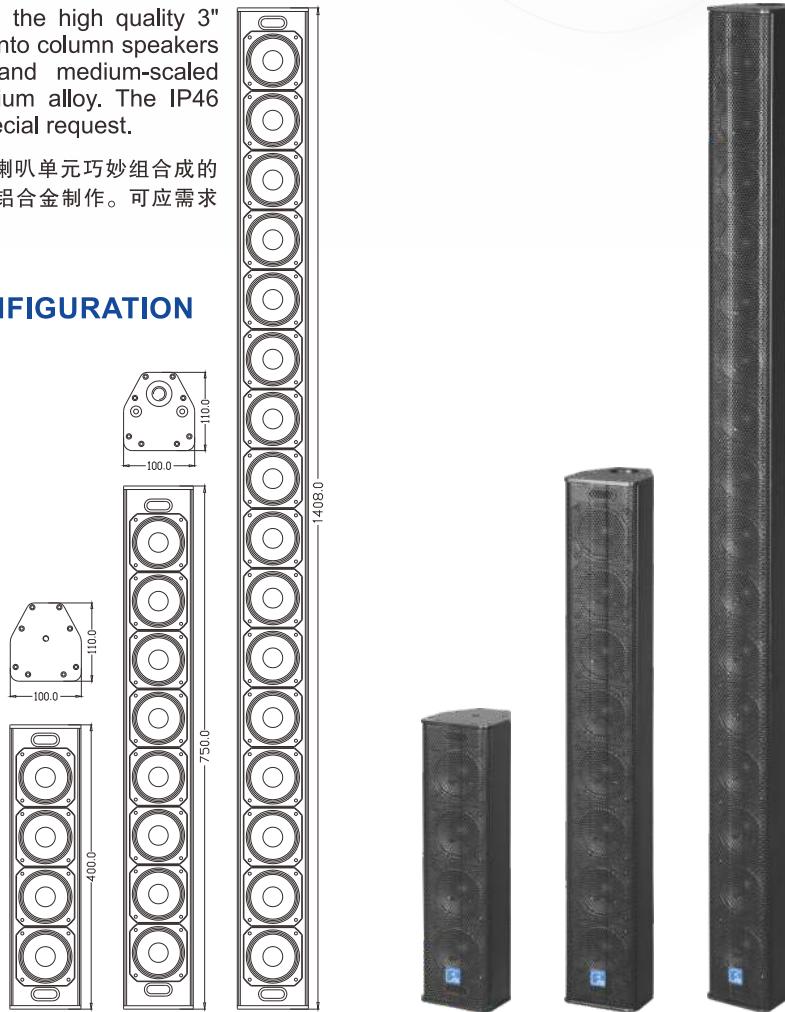

MODEL

FREQUENCY RESPONSE(-3dB)

FREQUENCY RESPONSE(-10dB)

DRIVERS

RATED POWER

SENSITIVITY

MAXIMUM SPL

IMPEDANCE

DISPERSION(-6dB)

INPUT CONNECTORS

PACKAGE SIZE

NET WEIGHT

GROSS WEIGHT

K403

120Hz-18kHz

115Hz-20kHz

4×3"(83mm)/0.8"voice coil

Mid/High Unit

100W RMS,400W peak

94dB 1watt/1meter

114dB continuous

120dB peak

16 ohms nominal

70° horizontal

2×Speakon NL4

285mm×210mm×465mm

(1pair/carton)

2.7 kg/pc

7 kg/pair

K803

120Hz-18kHz

115Hz-20kHz

8×3"(83mm)/0.8"voice coil

Mid/High Unit

200W RMS,800W peak

97dB 1watt/1meter

120dB continuous,

126dB peak

8 ohms nominal

70° horizontal

2×Speakon NL4

840mm×340mm×195mm

(1pair/carton)

4.7 kg/pc

12 kg/pair

K163

120Hz-18kHz

115Hz-20kHz

16×3"(83mm)/0.8"voice coil

Mid/High Unit

400W RMS,1600W peak

100dB 1watt/1meter

126dB continuous

132dB peak

4 ohms nominal

70° horizontal

2×Speakon NL4

1498mm×340mm×195mm

(1pair/carton)

8.8 kg/pc

21 kg/pair