



MLA218S

MLAseries MLA218SA

Line Array System

FEATURES

- High quality plywood with polyurea paint
- Bass reflex and horn-loaded design
- Compact vented sub-bass
- Good used for stadiums, big scale performance, conference centers and odeums

产品特征

- 高质量单元配置，高强度夹板箱体
- 综合式设计，低音丰富自然
- 超长品质保证期：品质与信心的保证

适用范围



- 配合MLA212线性阵列扬声器系统，增加低音表现
- 大型演出、体育场馆
- 流动演出、乐队扩声、剧院、音乐厅演艺中心

The MLA218S is a dual 15" low frequency enclosure designed for sub-bass reinforcement to MLA212, made of high quality plywood with polyurea waterproof paint. All rigging parts are made of aluminum alloy. The MLA218SA is equipped with BA2.88 digital amplifier module based on MLA218S to be an active subwoofer .

MLA218S是一款双18"超低音箱。采用两只18" 100芯低音单元，综合式箱体设计，吊挂系统采用铝合金材质，与MLA212配合，可吊挂、可堆码，以提升系统低频表现，箱体采用多层复合夹板，聚脲喷涂。MLA218SA是在MLA218S的基础上配置BA2.88功放组件成为有源音箱。



CONFIGURATION

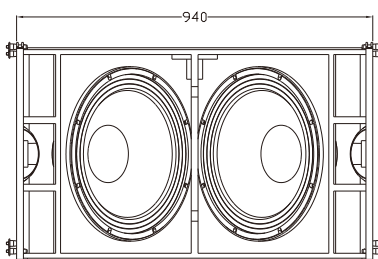

MODEL

FREQUENCY RESPONSE(-3dB)

DRIVERS

RATED POWER

SENSITIVITY

MAXIMUM SPL

IMPEDANCE

INPUT CONNECTORS

PACKAGE SIZE

NET WEIGHT

GROSS WEIGHT

MLA218S

35Hz-150Hz

2×18"(460mm)/4"voice coil LF

1200W RMS,4800W peak

103dB 1watt/1meter

134dB continuous,140dB peak

4 ohms nominal

2×Speakon NL4

1030mm×850mm×655mm

77 kg/pc

87 kg/pc

MLA218SA

35Hz-150Hz

2×18"(460mm)/4"voice coil LF

1200W/4Ω+1200W/4Ω

--

134dB continuous,140dB peak

--

INPUT TYPE:Balanced Differential line

1030mm×850mm×655mm

80 kg/pc

99 kg/pc