



# DLA series DLA406

## Line Array System

### FEATURES

- High quality plywood with wear-resistant and waterproof polyurea paint
- High quality neodymium components
- Special line array horn
- Small cabinet, light weight, high SPL
- Convenient for supporting, hanging and stacking
- Good used for conference rooms, multi-purpose halls, high-end hotels and moving performance

### 系统特征

- 高品质单元配置，专用波导管加号角：保证音质，投射精准
- 多种组合使用方式：可吊挂、堆码、支撑，安装快捷


### 适用范围

- 多功能厅、高级会所、会议室、报告厅
- 中小型流动演出

**DLA406 is a small and medium sized line array speaker** with high integration degree and accurate coverage angle, small size, light weight and high SPL. It uses low distortion mid-bass unit, high quality HF driver with special waveguide and horn, accurate and uniform coverage over the effective frequency range. The hanging system is simple and easy to assemble, and can be used in combination with multiple speakers. Unit configuration: 4 x 6" high efficiency mid-bass units, 2x1" exit throat 44mm voice coil HF drivers; The wood box adopts multilayer composite plywood, wear-resistant and waterproof polyurea paint.

**DLA406是一款中小型集成度高，覆盖角度精准的线性阵列音箱**，具有较小的体积和较轻的重量，较大声压级，应用低失真中低音单元，高品质驱动器配上专用波导管加号角，在有效频率范围内，覆盖精确和均匀，吊挂系统简单易装配，可多只组合使用。单元配置：4只6"中低音单元，2只1"喉口44芯高音驱动器；箱体采用多层复合夹板，耐磨聚脲喷涂。

### CONFIGURATION

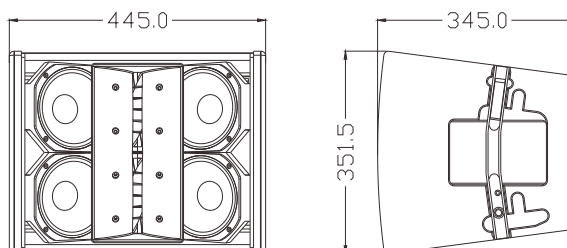

#### MODEL

**FREQUENCY RESPONSE(-3dB)**

**FREQUENCY RESPONSE(-10dB)**

#### DRIVERS

#### RATED POWER

#### SENSITIVITY

#### MAXIMUM SPL

#### IMPEDANCE

#### DISPERSION(-6dB)

#### CROSSOVER FREQUENCIES

#### INPUT CONNECTORS

#### PACKAGE SIZE

#### NET WEIGHT

#### GROSS WEIGHT

#### DLA406

80Hz-18kHz

75Hz-20kHz

4×6"(150mm)/1.5"voice coil LF

2×1"(25mm)/1.7"voice coil HF

320W RMS,1280W peak

99dB 1watt/1 metre

124 dB continuous,130 dB peak

8 ohms nominal

Horizontal coverage: 100°

Vertical coverage: Varies, depending on array length and configuration

1.1kHz passive

2×Speakon NL4

442mm×435mm×545mm

14 kg/pc

17 kg/pc