

K series K403II K803II K163II

Mid / High Unit System

The K403 II /803 II /163 II is a series product, using the high quality 3" neodymium speaker units skillfully assembled into column speakers to meet the demands of different small and medium-scaled places, and the box body is made of aluminium alloy. The IP46 international standard can be met based on special request.

K403 II /K803 II /K163 II 是一个系列产品，利用优质3"喇叭单元巧妙组合成的音柱，以满足不同中小型场所使用需求，箱体采用铝合金制作。可应需求做到满足IP46国际标准。

FEATURES

- Light weight aluminium alloy enclosure
- Multi combinations and installation ways
- Hidden and external connections
- Used for moving performance, church and multi-purpose hall


产品特点

- 高质量单元配置，铝合金箱体
- 多种安装方式，操作简易快捷
- 隐藏及外部两种接线方式

适用范围

- 会议室，多功能厅、教堂、小型流动商演

CONFIGURATION

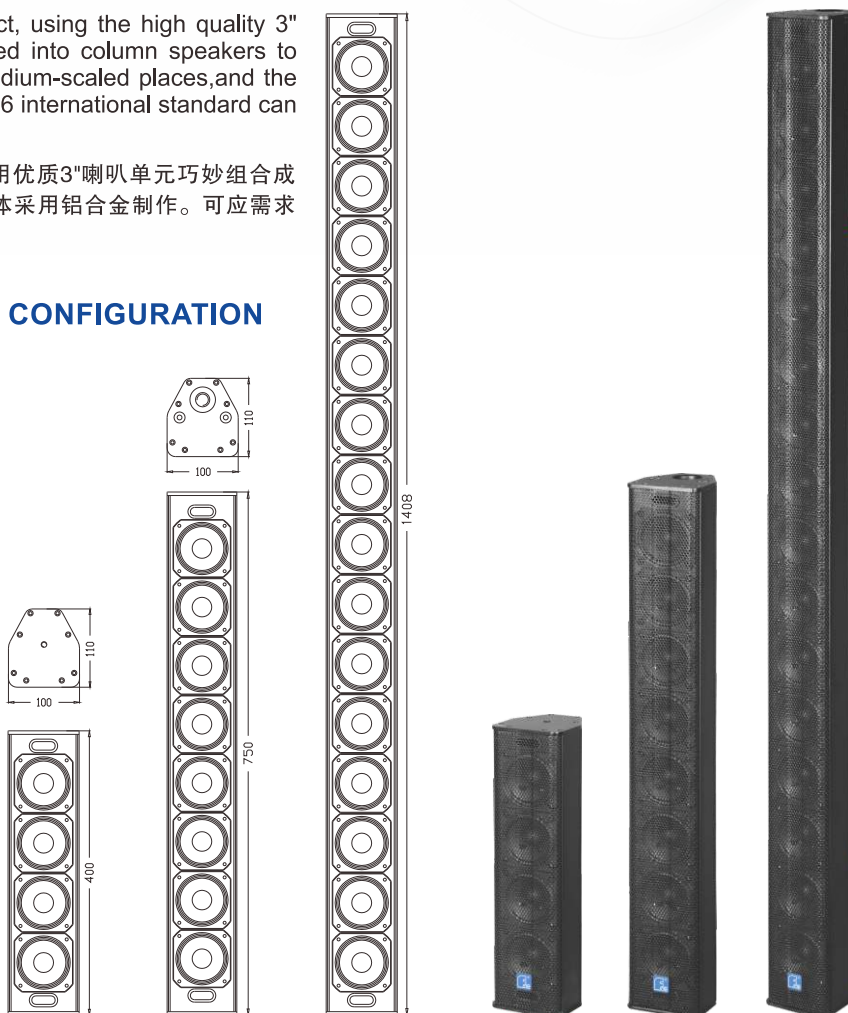

MODEL	K403 II	K803 II	K163 II
FREQUENCY RESPONSE(-3dB)	120Hz-18kHz	120Hz-18kHz	120Hz-18kHz
FREQUENCY RESPONSE(-10dB)	115Hz-20kHz	115Hz-20kHz	115Hz-20kHz
DRIVERS	4×3"(83mm)/0.8"voice coil Mid/High Unit	8×3"(83mm)/0.8"voice coil Mid/High Unit	16×3"(83mm)/0.8"voice coil Mid/High Unit
RATED POWER	100W RMS,400W peak	200W RMS,800W peak	400W RMS,1600W peak
SENSITIVITY	94dB 1watt/1meter	97dB 1watt/1meter	100dB 1watt/1meter
MAXIMUM SPL	114dB continuous 120dB peak	120dB continuous, 126dB peak	126dB continuous 132dB peak
IMPEDANCE	16 ohms nominal	8 ohms nominal	4 ohms nominal
DISPERSION(-6dB)	70° horizontal	70° horizontal	70° horizontal
INPUT CONNECTORS	2×Speakon NL4	2×Speakon NL4	2×Speakon NL4
PACKAGE SIZE	285mm×210mm×465mm (1pair/carton)	840mm×340mm×195mm (1pair/carton)	1498mm×340mm×195mm (1pair/carton)
NET WEIGHT	2.7 kg/pc	4.7 kg/pc	8.8 kg/pc
GROSS WEIGHT	7 kg/pair	12 kg/pair	21 kg/pair