



DLA series DLA112

Line Array System

FEATURES

- High quality components, special designed waveguide and horn, ensure accurate coverage angle and uniform changes
- Passive way, simple operation, save amplifiers
- Quick setup for hanging, stacking and supporting
- Applications: multifunction halls, lecture halls, auditoriums, stadiums and touring

系统特征

- 产品参数已录入EASE扬声器数据库
- 高品质单元配置，专用线性号角：保证音质，覆盖精准
- 内置分音：操作简单，节省功放及周边设备
- 多种组合使用方式：吊挂、堆码、支撑，安装快捷、安全




适用范围

- 多功能厅、报告厅、礼堂、体育场馆
- 流动演出

DLA112 is a light weight, high SPL, single 12" line array speaker. It features low distortion mid-bass unit, double HF drivers with special integrated waveguide and horn, accurate coverage, uniform changes, three-point hanging system, the whole system installation is fast, stable and safe. Unit configuration: 1x12" high efficiency neodymium mid-bass unit, 2x1.4" exit throat 44mm voice coil neodymium HF driver. The cabinet is made of multilayer composite plywood with wear-resistant polyurea paint.

DLA112是一款单12"线性阵列音箱，具有重量轻，声压级大等特点，应用低失真中低音单元，双驱动器配上专用一体化波导管与号角。覆盖精确、变化均匀。三点吊挂系统安装快捷、稳定、安全。单元配置：1只12"钕磁高效率中低音单元，2只1"喉口44芯钕磁高音驱动器；箱体采用多层复合夹板，耐磨聚脲喷涂。

CONFIGURATION

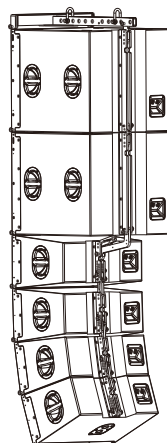

MODEL

FREQUENCY RESPONSE(-3dB)

FREQUENCY RESPONSE(-10dB)

DRIVERS

RATED POWER

SENSITIVITY

MAXIMUM SPL

IMPEDANCE

DISPERSION(-6dB)

CROSSOVER FREQUENCIES

INPUT CONNECTORS

PACKAGE SIZE

NET WEIGHT

GROSS WEIGHT

DLA112

60Hz-18KHz

55Hz-20kHz

1 × 12"(300mm)/3"voice coil LF

2 × 1"(25mm)/1.7"voice coil HF

400W RMS,1600W peak

98dB 1watt/1meter

122dB continuous,128dB peak

8 ohms nominal

Horizontal coverage: 90°

Vertical coverage: Varies, depending on array length and configuration

1.3kHz passive

2 × Speakon NL4

515mm × 430mm × 655mm

19 kg/pc

22 kg/pc

