

MRseries MR208 MR208A

Two-way Loudspeaker System



The **MR208** is a high precision and high power stage monitor, made of high quality plywood with polyurea paint. It offers a "studio monitoring" type of response, exceptional dynamic capability and very low distortion. Fitted with two 8" woofer and one 1" exit neodymium compression driver. MR208A is equipped with FA1.6 digital amplifier module based on MR208 to be an active monitor.

MR208是一款双8"两分音全音域舞台监听音箱，采用两只8"高效率中低音单元，一只1"喉口44芯强磁高音驱动器，箱体采用多层复合夹板，聚脲喷涂制作。MR208A是在MR208的基础上配置FA1.6功放组件成为有源音箱。



FEATURES

- High quality plywood with polyurea waterproof paint
- Neodymium HF driver
- Top hat fitting for pole mounting"


产品特点

- 高质量单元配置，高强度夹板箱体
- 超长品质保证期：品质与信心的保证

适用范围

- 多功能厅、高级酒店会所
- 流动商演、乐队扩声以及舞台返送音箱

CONFIGURATION

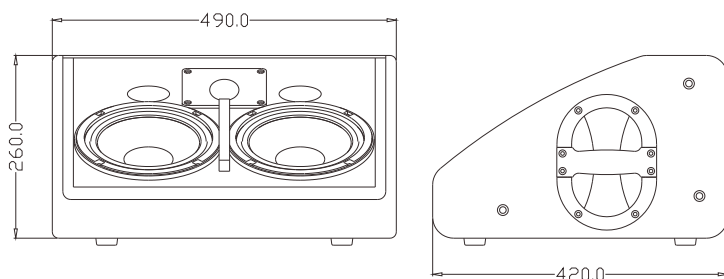

MODEL

FREQUENCY RESPONSE(-3dB)
FREQUENCY RESPONSE(-10dB)
DRIVERS

RATED POWER

SENSITIVITY
MAXIMUM SPL
IMPEDANCE
DISPERSION(-6dB)
CROSSOVER FREQUENCIES

INPUT CONNECTORS

PACKAGE SIZE
NET WEIGHT
GROSS WEIGHT

MR208

70Hz-18kHz
65Hz-20kHz
2×8"(200mm)/2" voice coil LF
1×1"(25mm)/1.7" voice coil HF
300W RMS,1200W peak
96dB 1watt/1meter
121dB continuous,127dB peak
8 ohms nominal
90° × 60°
2.7KHz passive
2×Speakon NL4
510mm×350mm×585mm
18kg/pc
21kg/pc

MR208A

70Hz-18kHz
65Hz-20kHz
2×8"(200mm)/2" voice coil LF
1×1"(25mm)/1.7" voice coil HF
600W/8Ω
--
121dB continuous,127dB peak
--
90° × 60°
--
INPUT TYPE: Balanced Differential line
510mm×350mm×585mm
19kg/pc
22kg/pc