



pro audio



# U series U115V U115VA

## Two-way Loudspeaker System

The U115V is the ideal general-purpose loudspeaker with a wide frequency response, suitable for all kinds of mid-field theatre and live venue applications that require professional sound quality. U115VA is equipped with FA1.6 digital amplifier module to be an active loudspeaker based on U115V.

U115V是一款15"两分音全音域音箱。采用一只15"高效率低音单元，一只1.4"喉口75芯复合振膜高音驱动器配置90°×40°可旋转号角，箱体采用多层复合夹板，水性环保喷涂制作。U115VA是在U115V的基础上配置FA1.6功放组件成为有源音箱。

### FEATURES

- High quality plywood with special environmental protection paint
- Wide-bandwidth system
- Rotatable 90°×40° horn
- Mid-high frequency's sensitivity can be adjusted
- Flexible mounting options
- Top hat fitting for tripod

### 产品特点


- 中高音灵敏度可调
- 高质量单元配置，高强度夹板箱体
- 多吊挂点与支撑配合，操作简易快捷
- 超长品质保证期：品质与信心的保证

### 适用范围

- 用于全音域扩声
- 多功能厅、高级酒店会所
- 流动商演、乐队扩声以及舞台返送音箱



### CONFIGURATION

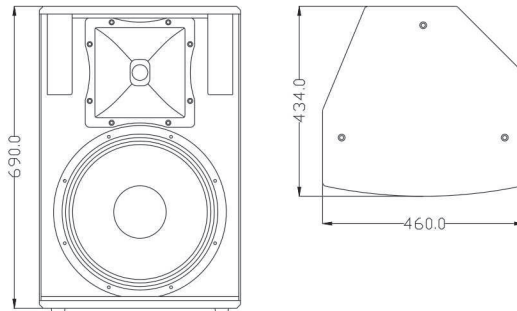

#### MODEL

**FREQUENCY RESPONSE(-3dB)**

**FREQUENCY RESPONSE(-10dB)**

**DRIVERS**

**RATED POWER**

**SENSITIVITY**

**MAXIMUM SPL**

**IMPEDANCE**

**DISPERSION(-6dB)**

**CROSSOVER FREQUENCIES**

**INPUT CONNECTORS**

**PACKAGE SIZE**

**NET WEIGHT**

**GROSS WEIGHT**

#### U115V

45Hz-18kHz

40 Hz-20kHz

1x15"(385mm)/3"voice coil LF

1x1.4"(36mm)/3"voice coil HF

400W(RMS),1600W peak

98dB 1watt/1meter

124dB continuous,130dB peak

8 ohms nominal

90°x40°

1.5kHz passive

2×Speakon NL4

580mmx560mmx820mm

30 kg/pc

35 kg/pc

#### U115VA

45Hz-18kHz

40 Hz-20kHz

1x15"(385mm)/3"voice coil LF

1x1"(25mm)/1.7"voice coil HF

600W/8Ω

--

124dB continuous,130dB peak

--

90°x40°

--

**INPUT TYPE:**Balanced Differential line

580mmx560mmx820mm

29 kg/pc

34 kg/pc