

# MLA118W MAseries MLA118WASII

Line Array System

**The MLA118W** is a single 18" low frequency enclosure designed for subbass reinforcement to MLA112, made of high quality plywood with polyurea waterproof paint. All rigging parts are made of aluminum alloy. The MLA118WASII is equipped with SA2.68II digital amplifier module based on MLA118W to be an active system to push 2pcs MLA112.

### **FEATURES**

pro audio


- High quality plywood with polyurea waterproof paint
- Direct radiating design
- High temperature 4" (100mm) voice coil

MLA118W是一款单18"超低音箱。采用一只18" 100芯低音单元,直射式结构设计, 吊挂系统采用铝合金材质,与MLA110或MLA112配合,可吊挂、可堆码,以提升系 统低频表现,箱体采用多层复合夹板,聚脲喷涂。MLA118WASII是在MLA118W的 基础上配置SA2.68II功放组件成为有源系统,与MLA110或MLA112配合使用。



## CONFIGURATION

**MLA118W** 

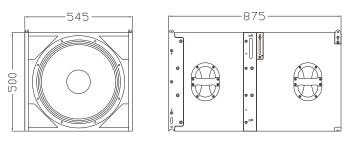

### 系统特征

- ●高质量单元配置,高强度夹板箱体
- ●直射式设计,低音丰富自然
- ●超长品质保证期:品质与信心的保证

#### 适用范围

- ●配合MLA110或MLA112线性阵列系统, 增加低音表现
- ●多功能厅、高级酒店会所
- ●流动商演、乐队扩声

#### MODEL

FREQUENCY RESPONSE(-3dB) DRIVERS RATED POWER SENSITIVITY MAXIMUM SPL IMPEDANCE INPUT CONNECTORS PACKAGE SIZE NET WEIGHT GROSS WEIGHT

35Hz-300Hz 1×18"(460mm)/4"voice coil LF 600W RMS,2400W peak 99dB 1watt/1meter 127dB continuous,133dB peak 8 ohms nominal 2×Speakon NL4 965mm×635mm×595mm 43 kg/pc 48 kg/pc MLA118WASII 35Hz-300Hz and 50Hz-20kHz 1×18"(460mm)/4"voice coil LF 900W/4Ω+1200W/4Ω

127dB continuous,133dB peak

INPUT TYPE:Balanced Differential line 965mm×635mm×595mm 45 kg/pc 50 kg/pc