

# MRseries MR12CNA

## Two-way Loudspeaker System




pro audio

The MR12CN is a high precision and high power stage monitor, made of high quality plywood with polyurea paint. It offers a "studio monitoring" type of response, exceptional dynamic capability and very low distortion. Fitted with one 12" neodymium woofer and one 1" exit neodymium compression driver coupled to a patent 70° x 40° horn. MR12CNA is equipped with FA1.6 digital amplifier module based on MR12CN to be an active monitor.

MR12CN 是一款12寸同轴两分音全音域舞台监听音箱，采用一只12寸高效率强磁中低音单元和一只1寸喉口44芯强磁驱动器，配置专门设计的70° × 40° 号角。箱体采用多层复合夹板，聚脲喷涂制作。MR12CNA是在MR12CN的基础上配置FA1.6功放组件成为有源音箱。



### CONFIGURATION

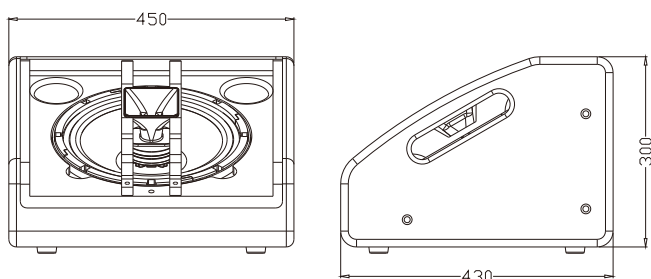

### FEATURES

- High quality plywood with polyurea waterproof paint
- Neodymium HF driver and LF driver
- Patent 70° x 40° horn

### 产品特点

- 高质量单元配置，高强度夹板箱体
- 超长品质保证期：品质与信心的保证

### 适用范围

- 多功能厅、高级酒店会所
- 流动商演、乐队扩声以及舞台返送音箱

#### MODEL

FREQUENCY RESPONSE(-3dB)  
FREQUENCY RESPONSE(-10dB)  
DRIVERS

#### RATED POWER

#### SENSITIVITY

#### MAXIMUM SPL

#### IMPEDANCE

#### DISPERSION(-6dB)

#### CROSSOVER FREQUENCIES

#### INPUT CONNECTORS

#### PACKAGE SIZE

#### NET WEIGHT

#### GROSS WEIGHT

#### MR12CN

75Hz-18kHz  
70Hz-20kHz  
1×12"(300mm)/3"voice coil LF  
1×1"(25mm)/1.7"voice coil HF  
300W RMS,1200W peak  
97dB 1watt/1 metre  
122dB continuous,128dB peak  
8 ohms nominal  
70° × 40°  
2.3kHz passive  
2×Speakon NL4  
520mm×390mm×545mm  
18 kg/pc  
21 kg/pc

#### MR12CNA

75Hz-18KHz  
70Hz-20kHz  
1×12"(300mm)/3"voice coil LF  
1×1"(25mm) / 1.7"voice coil HF  
600W/8Ω  
--  
122dB continuous,128dB peak  
--  
70° × 40°  
--  
INPUT TYPE: Balanced Differential line  
520mm×390mm×545mm  
20 kg/pc  
23 kg/pc