



DLA115B DLA series DLA115BAS

Line Array System

FEATURES

- High quality plywood with wear-resistant and waterproof polyurea paint
- Bass-reflex design
- High temperature resistant 4"(100mm) voice coil
- Support pole mounting
- Used for sub-bass reinforcement

系统特征

- 高品质单元配置，直射倒相式箱体结构设计，保证音质自然有力度
- 多种组合使用方式：可吊挂、堆码、支撑，安装快捷

适用范围


- 多功能厅、高级会所、会议室、报告厅
- 中小型流动演出

DLA115B is a single 15" subwoofer. It uses 1x15" 100mm voice coil woofer, bass-reflex design, hanging system adopts aluminum alloy material, can be hung, supported and stacked with DLA206. The wood box adopts multilayer composite plywood, wear-resistant and waterproof polyurea paint. DLA115BAS is equipped with SA2.68 digital amplifier module based on DLA115B to be an active system with DLA206.

DLA115B是一款单15"线性超低音箱，采用1只15"100芯低音单元，直射倒相式箱体结构设计，吊挂系统采用铝合金材质，与DLA206配合，可吊挂、支撑、堆码，用以提升系统低频表现，箱体采用多层复合夹板，耐磨聚脲喷涂。DLA115BAS是在DLA115B的基础上配置SA2.68D类功放与DLA206组成有源扩声系统。



CONFIGURATION

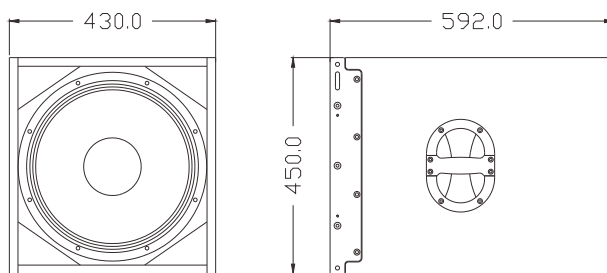

MODEL

FREQUENCY RESPONSE(-3dB)

DRIVERS

RATED POWER

SENSITIVITY

MAXIMUM SPL

IMPEDANCE

INPUT CONNECTORS

PACKAGE SIZE

NET WEIGHT

GROSS WEIGHT

DLA115B

40Hz-300Hz

1×15"(385mm)/4"voice coil LF

600W RMS,2400W peak

99dB 1watt/1 metre

127dB continuous,133 dB peak

8 ohms nominal

2×Speakon NL4

682mm×520mm×550mm

34 kg/pc

38 kg/pc

DLA115BAS

40Hz-300Hz and 50Hz-20kHz

1×15"(385mm)/4"voice coil LF

900W/4Ω+1200W/4Ω

—

127dB continuous,133 dB peak

—

INPUT TYPE: Balanced Differential line

682mm×520mm×550mm

36 kg/pc

40 kg/pc