

DLA115W DLA series DLA115WAS

Line Array System



DLA115W is a single 15" subwoofer. It uses 1x15" 100mm voice coil woofer, bass-reflex design, hanging system adopts aluminum alloy material, can be hung, supported and stacked with DLA406. The wood box adopts multilayer composite plywood, wear-resistant and waterproof polyurea paint. DLA115WAS is equipped with SA2.68 digital amplifier module based on DLA115W to be an active system with DLA406.

DLA115W是一款单15"线性超低音箱，采用1只15" 100芯低音单元，直射倒相箱体结构设计，吊挂系统采用铝合金材质，与DLA406配合，可吊挂、支撑、堆码，用以提升系统低频表现，箱体采用多层复合夹板，耐磨聚脲喷涂。DLA115WAS是在DLA115W的基础上配置SA2.68D类功放与DLA406组成有源扩声系统。



FEATURES

- High quality plywood with wear-resistant and waterproof polyurea paint
- Bass-reflex design
- High temperature resistant 4"(100mm) voice coil
- Support pole mounting
- Used for sub-bass reinforcement


系统特征

- 高品质单元配置，直射倒相箱体结构设计，保证音质自然有力度
- 多种组合使用方式：可吊挂、堆码、支撑，安装快捷

适用范围

- 多功能厅、高级会所、会议室、报告厅
- 流动演出

CONFIGURATION

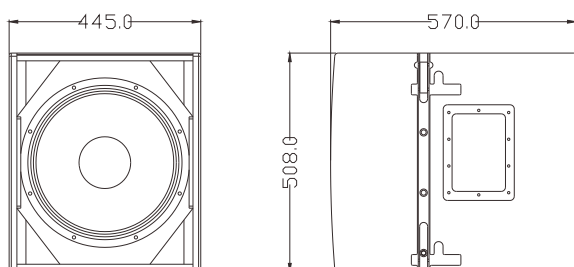

MODEL

FREQUENCY RESPONSE(-3dB)

DRIVERS

RATED POWER

SENSITIVITY

MAXIMUM SPL

IMPEDANCE

INPUT CONNECTORS

PACKAGE SIZE

NET WEIGHT

GROSS WEIGHT

DLA115W

40Hz-300Hz

1×15"(385mm)/4"voice coil LF

600W RMS,2400W peak

99dB 1watt/1 metre

127dB continuous,133 dB peak

8 ohms nominal

2×Speakon NL4

650mm×535mm×608mm

35 kg/pc

39 kg/pc

DLA115WAS

40Hz-300Hz and 50Hz-20kHz

1×15"(385mm)/4"voice coil LF

900W/4Ω+1200W/4Ω

—

127dB continuous,133 dB peak

—

INPUT TYPE: Balanced Differential line

650mm×535mm×608mm

37 kg/pc

41 kg/pc