

MAseries MLA110


Line Array System



The **MLA110** is a small and medium scale line array loudspeaker for long throw distance scale sound reinforcement, fitted with one 10" neodymium LF driver and one 1.4" neodymium HF driver coupled to a patent line array horn, made of high quality plywood with polyurea waterproof paint. All rigging parts are made of aluminium alloy.

MLA110是一款中小型、高精度线性阵列扬声器系统，它具有较小的体积和较轻重量，却有较大的声压级，应用低失真中低音单元及专利线性号角，能真实还原规定范围内音频信号。吊挂系统全部采用铝合金材质，人性化设计使整个系统安装快捷及保证安全。单元配置：一只10"高效率强磁中低音单元，一只专利声透镜号角配置一只1.4"喉口75芯强磁高音驱动器；箱体采用多层复合夹板，聚脲喷涂制作。

CONFIGURATION

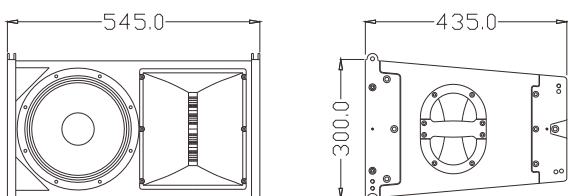

MODEL
FREQUENCY RESPONSE(-3dB)
FREQUENCY RESPONSE(-10dB)
DRIVERS

RATED POWER
SENSITIVITY
MAXIMUM SPL
IMPEDANCE
DISPERSION(-6dB)

CROSSOVER FREQUENCIES
INPUT CONNECTORS
PACKAGE SIZE
NET WEIGHT
GROSS WEIGHT

FEATURES

- High quality plywood with polyurea waterproof paint
- High quality neodymium components
- Patent line array horn
- Small cabinet with light weight, but with high SPL
- Passive or Bi-amp operation
- Convenient for hanging and stacking
- Good used for moving performance, small scale theater and band

产品特点

- 高质量单元配置，专利线性号角：高保真音质，投射精确
- 内、外置分频选择，操作简便灵活又可最大发挥使用者的技术优势
- 方便简捷的吊挂方式：可吊挂，可堆码，可支撑，安装快捷、灵活
- 超长品质保证期：品质与信心的保证

适用范围

- 中小型流动演出
- 多功能厅、酒店会所

MLA110
55Hz-18kHz
50Hz-20kHz
1×10"(250mm)/3"voice coil LF
1×1.4"(36mm)/3"voice coil HF
250W RMS,1000W peak
98dB 1watt/1meter
122dB continuous,128dB peak
16 ohms nominal
Horizontal coverage: 100°
Vertical coverage: Varies, depending on array length and configuration
1.3kHz passive
2×Speakon NL4
525mm×410mm×640mm
20 kg/pc
23 kg/pc