

KS series

KARAOKE SYSTEM



KS series KS-308

Three-way Loudspeaker System



The KS-308 is three speakers three way speaker for KTV, one 8" woofer, two 3" cone tweeter

KS-308是一款8寸三单元三分音全音域音箱。采用一只8寸发泡边低音单元，两只3寸纸锥高音，箱体采用高密度复合板，特殊喷涂制作。

FEATURES

- Three speakers three way system for KTV
- One 8" woofer two 3" paper cone tweeter
- Protection function, double alnico magnetic flow design
- Natural and fluent sound to provide stereo sound field


产品特点

- 高质量单元配置，高密度复合板箱体
- 标准吊挂装置
- 超长品质保证期：品质与信心的保证

适用范围

- 用于全音域扩声、卡拉OK系统
- 背景音乐，量贩式卡拉OK等

CONFIGURATION

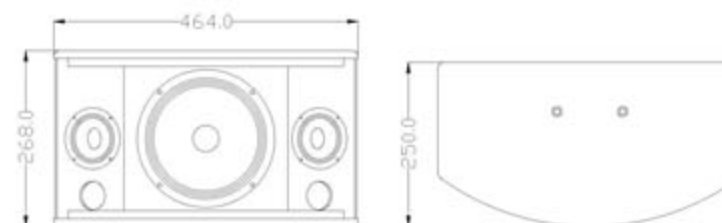

FREQUENCY RESPONSE(-3dB)	38Hz-18kHz
DRIVERS	1×8" (200mm) Woofer 2×3" (75mm) cone tweeter
RATED POWER	100W RMS
SENSITIVITY	90dB/ 1watt/1 metre
MAXIMUM SPL	110 dB continuous, 116 dB peak
IMPEDANCE	8 ohms nominal
CROSSOVER FREQUENCIES	1.5 kHz passive
PACKAGE SIZE	586mmx340mmx541mm (1pair)
NET WEIGHT	7.4 kg
GROSS WEIGHT	18kg



KS series **KS-310**

Three-way Loudspeaker System

The **KS-310** is three speakers three way speaker for KTV, one 10" woofer, two 3" cone tweeter

KS-310是一款单10寸三单元三分音全音域音箱。采用一只10寸发泡边低音单元，两只3寸纸锥高音，箱体采用高密度复合板，特殊喷涂制作。

FEATURES

- Three speakers three way system for KTV
- One 10" woofer two 3" paper cone tweeter
- Protection function, double alnico magnetic flow design
- Natural and fluent sound to provide stereo sound field


产品特点

- 高质量单元配置，高密度复合板箱体
- 标准吊挂装置
- 超长品质保证期：品质与信心的保证

适用范围

- 用于全音域扩声、卡拉OK系统
- 背景音乐，量贩式卡拉OK等

CONFIGURATION

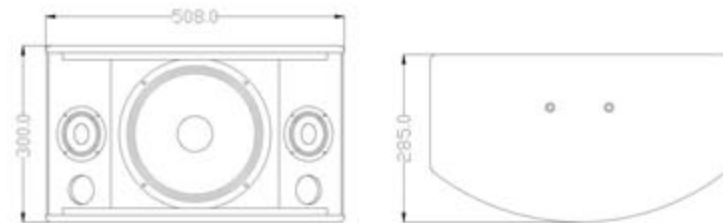

KS series **KS-510**

Three-way Loudspeaker System

The **KS-510** is five speakers three way speaker for KTV, one 10" woofer, two 4" cone mid, two 2.5" cone tweeter.

KS-510是一款单10寸五单元三分音全音域音箱。采用一只10寸发泡边低音单元，两只4寸纸盆中音，两只2.5寸纸盆高音，箱体采用高密度复合板，特殊喷涂制作。

FEATURES

- Five speakers three way speaker for KTV
- Protection function, double magnetic design
- Natural and fluent sound to provide stereo sound field


产品特点

- 高质量单元配置，高密度复合板箱体
- 标准吊挂装置
- 超长品质保证期：品质与信心的保证

适用范围

- 用于全音域扩声、卡拉OK系统
- 背景音乐，量贩式卡拉OK等

CONFIGURATION

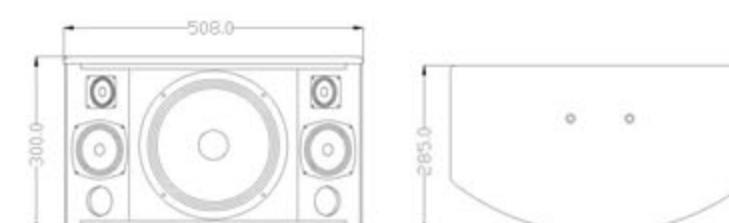

FREQUENCY RESPONSE(-3dB)	35Hz-20kHz
DRIVERS	1×10" (250mm) Woofer 2×3" (75mm) cone mid 2×2" (50mm) cone tweeter
RATED POWER	150W RMS
SENSITIVITY	92dB/ 1watt/1 metre
MAXIMUM SPL	113 dB continuous, 119 dB peak
IMPEDANCE	8 ohms nominal
CROSSOVER FREQUENCIES	1.5 kHz 3kHz passive
PACKAGE SIZE	656mmx372mmx585mm (1pair)
NET WEIGHT	13.5 kg
GROSS WEIGHT	30kg

FREQUENCY RESPONSE(-3dB)	35Hz-18kHz
DRIVERS	1×10" (250mm) Woofer 2×3" (75mm) cone tweeter
RATED POWER	150W RMS
SENSITIVITY	92dB/ 1watt/1 metre
MAXIMUM SPL	113 dB continuous, 119 dB peak
IMPEDANCE	8 ohms nominal
CROSSOVER FREQUENCIES	1.5 kHz passive
PACKAGE SIZE	656mmx372mmx585mm (1pair)
NET WEIGHT	10.5 kg
GROSS WEIGHT	25kg



KS series KS-512

Three-way Loudspeaker System

The KS-512 is five speakers three way speaker for KTV, one 12" woofer, two 4" cone mid, two 3" cone tweeter

KS-512是一款单12寸五单元三分音全音域音箱。采用一只12寸发泡边低音单元，两只4寸纸锥中音，两只3寸纸锥高音，箱体采用高密度复合板，特殊喷涂制作。

FEATURES

- Three speakers three way system for KTV
- One 12" woofer two 4" cone mid two 3" cone tweeter
- Protection function, double alnico magnetic flow design
- Natural and fluent sound to provide stereo sound field



产品特征

- 高质量单元配置，高密度复合板箱体
- 标准悬挂装置
- 超长品质保证期：品质与信心的保证

适用范围

- 用于全音域扩声、卡拉OK系统
- 背景音乐、量贩式卡拉OK等

CONFIGURATION

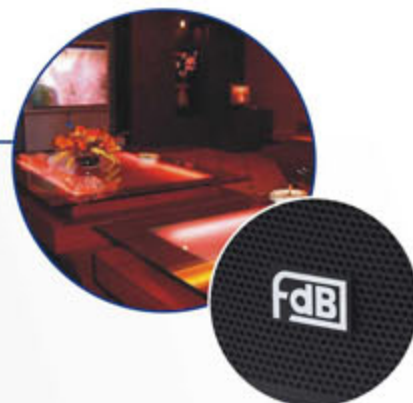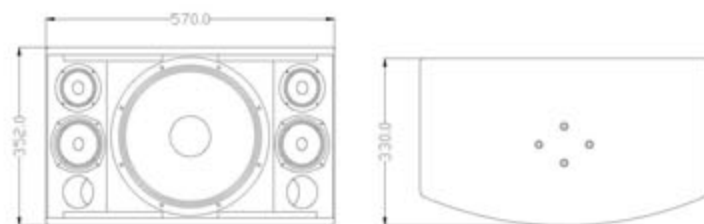

KS series KS-408

Two-way Loudspeaker System

The KS-408 is four speakers two way speaker for KTV, two 8" woofer, two 1" driver with horn

KS-408是一款双8寸四单元组合式全音域音箱。采用两只8寸发泡边低音单元，2只1寸喉口25芯高分子聚酯膜高音驱动器配置140°x140°宽指向性号角，箱体采用高密度复合板，特殊喷涂制作。

FEATURES

- Four speakers two way speaker for KTV
- Two 8" woofer two 1" driver with horn
- Protection function, double alnico magnetic flow design
- Natural and fluent sound to provide stereo sound field


产品特征

- 高质量单元配置，高密度复合板箱体
- 辅助声场设计技术应用
- 标准悬挂装置
- 超长品质保证期：品质与信心的保证

适用范围

- 用于全音域扩声、高级卡拉OK包房
- 多功能厅、高级酒店会所

CONFIGURATION

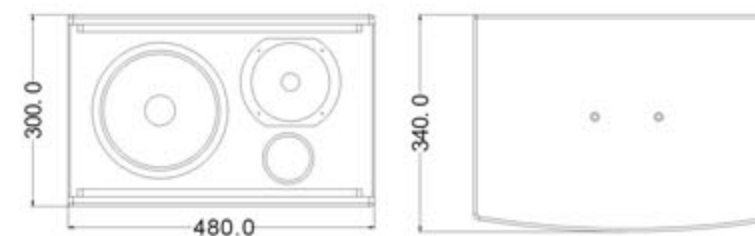

FREQUENCY RESPONSE	38Hz-20kHz
DRIVERS	2×8" (200mm) LF driver 2×1" (25mm) exit compression driver
RATED POWER	200W RMS
SENSITIVITY	93dB/ 1watt/1 metre
MAXIMUM SPL	116 dB continuous, 122 dB peak
IMPEDANCE	4 ohms nominal
CROSSOVER	2.2 kHz passive
DIMENSIONS	790mm×395mm×580mm (1pair)
NET WEIGHT	14 kg
GROSS WEIGHT	32kg

FREQUENCY RESPONSE(-3dB)	30Hz-18kHz
DRIVERS	1×12" (300mm) Woofer 2×4" (100mm) cone mid 2×3" (75mm) cone tweeter
RATED POWER	250W RMS
SENSITIVITY	94dB/ 1watt/1 metre
MAXIMUM SPL	118 dB continuous, 126 dB peak
IMPEDANCE	8 ohms nominal
CROSSOVER FREQUENCIES	1.5kHz 3kHz passive
PACKAGE SIZE	695mm×424mm×648mm (1pair)
NET WEIGHT	18.6 kg
GROSS WEIGHT	42kg



KS series KS-410

Two-way Loudspeaker System

FEATURES

- Four speakers two way speaker for KTV
- Two 10" woofer two 1" driver with horn
- Protection function, double alnico magnetic flow design
- Natural and fluent sound to provide stereo sound field

The KS-410 is four speakers two way speaker for KTV, two 10" woofer, two 1" driver with horn

KS-410是一款双10寸四单元组合式全音域音箱。采用两只10寸发泡边低音单元，2只1寸喉口25芯高分子聚酯膜高音驱动器配置140x140宽指向性号角，箱体采用高密度复合板，特殊喷涂制作。


产品特征

- 高质量单元配置，高密度复合板箱体
- 辅佐声场设计技术应用
- 标准吊挂装置
- 超长品质保证期：品质与信心的保证

适用范围

- 用于全音域扩声、高级卡拉OK包房
- 多功能厅、高级酒店会所

CONFIGURATION

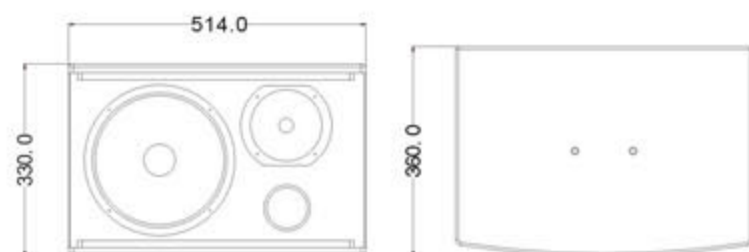

FREQUENCY RESPONSE	35Hz-20kHz
DRIVERS	2×10" (250mm) LF driver 2×1" (25mm) exit compression driver
RATED POWER	300W RMS
SENSITIVITY	95dB/ 1watt/1 metre
MAXIMUM SPL	120 dB continuous, 126 dB peak
IMPEDANCE	4 ohms nominal
CROSSOVER	1.5 kHz passive
DIMENSIONS	835mm×425mm×615mm (1pair)
NET WEIGHT	17.5kg
GROSS WEIGHT	40kg