

MLA418B MLA series MLA418BAS

Line Array System



The **MLA418B** is a single 18" low frequency enclosure designed for sub-bass reinforcement to MLA412, made of high quality plywood with polyurea waterproof paint. All rigging parts are made of aluminium alloy. The MLA418BAS is equipped with SA2.68 digital amplifier module based on MLA418B to be an active system to push 2pcs MLA412.


MLA418B是一款单18"超低音箱。采用一只18" 100芯低音单元，直射式结构设计，吊挂系统采用铝合金材质，与MLA412配合，可吊挂、可堆码，以提升系统低频表现，箱体采用多层复合夹板，聚脲喷涂。MLA418BAS是在MLA418B的基础上配置SA2.68功放组件成为有源系统，与MLA412配合使用。



FEATURES

- High quality plywood with polyurea waterproof paint
- Direct radiating design
- High temperature 4" (100mm) voice coil

CONFIGURATION

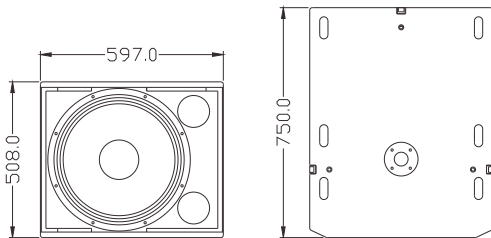

系统特征

- 高质量单元配置，高强度夹板箱体
- 推挽式设计，低音丰富自然
- 超长品质保证期：品质与信心的保证

适用范围

- 配合MLA412线性阵列系统，增加低音表现
- 多功能厅、高级酒店会所
- 流动商演、乐队扩声

MODEL

FREQUENCY RESPONSE(-3dB)

DRIVERS

RATED POWER

SENSITIVITY

MAXIMUM SPL

IMPEDANCE

INPUT CONNECTORS

PACKAGE SIZE

NET WEIGHT

GROSS WEIGHT

MLA418B

35Hz-300Hz

1X18"(460mm)/4"voice coil LF

600W(RMS),2400W peak

99dB 1watt/1meter

127dB continuous,133dB peak

8 ohms nominal

2xSpeakon NL4

840mmx687mmx603mm

44 kg/pc

51 kg/pc

MLA418BAS

35Hz-300Hz and 50Hz-18kHz

1X18"(460mm)/4"voice coil LF

600W +800W(RMS)

--

127dB continuous,133dB peak

--

INPUT TYPE:Balanced Differential line

840mmx687mmx603mm

46 kg/pc

53 kg/pc