

# FTseries FT8II

## Two-way Loudspeaker System




The **FT8 II** is a 2-way system with one 8" (200mm) woofer and one 1"(25mm) exit compression driver mounted on a rotatable  $90^{\circ} \times 50^{\circ}$  horn.

**FT8 II** 是一款8"两分音全音域音箱。采用一只8"高效率低音单元，一只1"喉口25芯高分子聚酯膜高音驱动器配置 $90^{\circ} \times 50^{\circ}$ 可旋转号角，箱体采用高密度复合板，水性环保喷涂制作。

### FEATURES

- High quality MDF with special environmental protection paint
- Ultra-compact two-way system
- Rotatable  $90^{\circ} \times 50^{\circ}$  horn

### CONFIGURATION

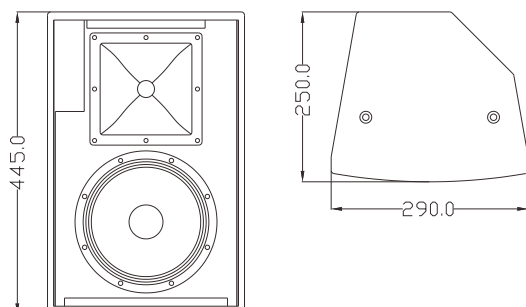

### 产品特点

- 高质量单元配置，高强度复合板箱体
- 体积小、重量轻便于搬运和固定安装
- 多吊挂点与支撑配合，操作简易快捷
- 超长品质保证期：品质与信心的保证

### 适用范围

- 用于全音域扩声、语言扩声会议系统
- 背景音乐重放、学校教室



<b>FREQUENCY RESPONSE(-3dB)</b>	<b>55Hz-18kHz</b>
<b>DRIVERS</b>	<b>1×8"(200mm)/1.5"voice coil LF</b>
	<b>1×1"(25mm)/1"voice coil HF</b>
<b>RATED POWER</b>	<b>100W RMS,400W peak</b>
<b>SENSITIVITY</b>	<b>92dB 1watt/1 metre</b>
<b>MAXIMUM SPL</b>	<b>112 dB continuous,118 dB peak</b>
<b>IMPEDANCE</b>	<b>8 ohms nominal</b>
<b>DISPERSION(-6dB)</b>	<b>90° × 50°</b>
<b>CROSSOVER FREQUENCIES</b>	<b>2.5 kHz passive</b>
<b>INPUT CONNECTORS</b>	<b>2× Speakon NL4</b>
<b>PACKAGE SIZE</b>	<b>615mm×380mm×535mm(carton/pair)</b>
<b>NET WEIGHT</b>	<b>9 kg/pc</b>
<b>GROSS WEIGHT</b>	<b>21 kg/pair</b>